


SPINOTTO DI ALIMENTAZIONE DA SALDARE

POWER PLUG TO SOLDER

CONNECTEUR D'ALIMENTATION À SOUDER

STECKER ZUR DC-STROMVERSORGUNG

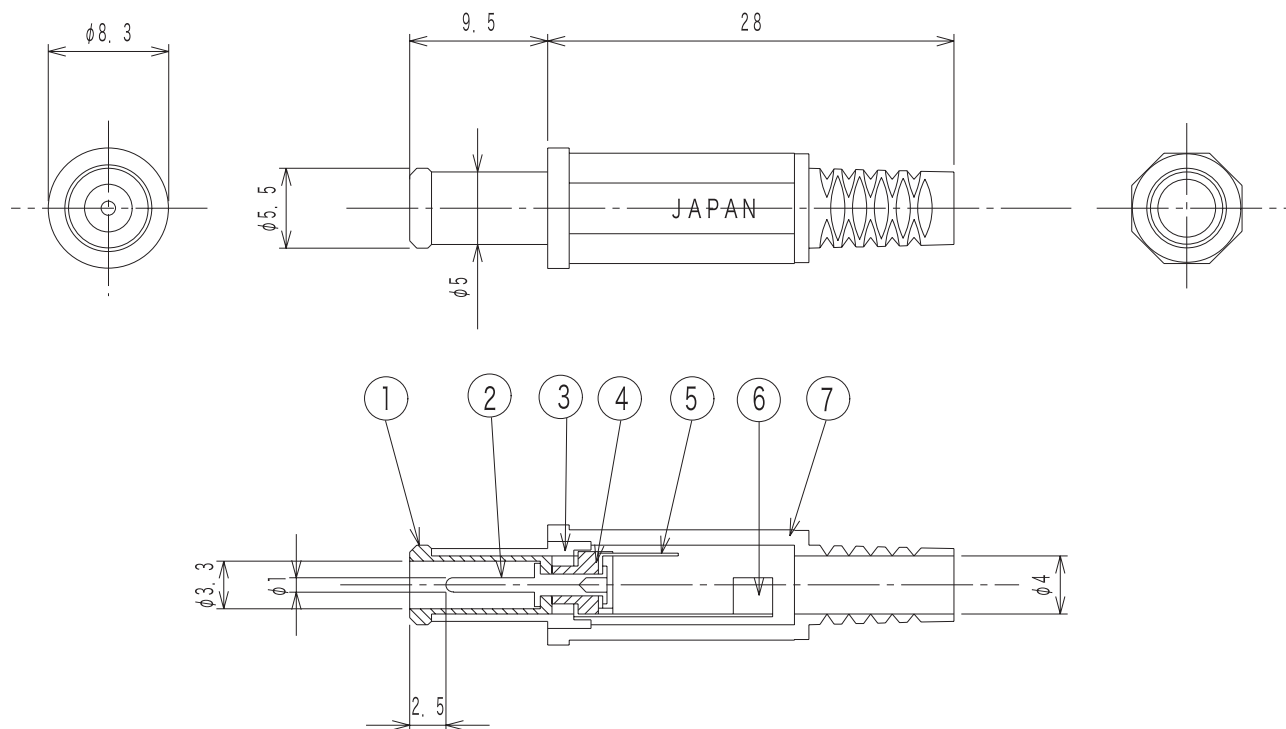

SPECIFICATION

1. RATING: DC13. 5V 2A
2. WITHSTANDING VOLTAGE : 500V AC FOR 1MINUTE
3. INSULATION RESISTANCE: 100MΩ MIN. AT 500V DC
4. CONTACT RESISTANCE: 30mΩ MAX

						TOLERANCE	SCALE	DATE		DESING	DRAW	INSPE	APRO
7	CAP	PE	1			±0.3	2/1	94/5/19		H. H	N. I		
6	TERMINAL B	BRASS	1	Ni		MODEL		QTY	PART NAME				
5	TERMINAL A	BRASS	1	Ni									
4	INSULATOR B	PC	1			MATERIAL				DRAW. NO			
3	CONTACT B	BRASS	1	Ni									
2	CONTACT A	BRASS	1	Ni		FINISH							
1	INSULATOR A	POM	1										
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE								

Codice - Code	Contatto - Contat	Ø esterno contatto - Ø external contact	Ø interno contatto - Ø internal contact
PRS17	Ottone - Brass	5,5 mm	3,3 mm