

Pompe autoadescanti  
Pompes auto-amorçantes  
Bombas autocebantes  
Automatic pumps  
Selbstansaugende Pumpen  
Zelfaanzuigende pompen





E1 CE DVGW-W270  
DIN 2001-2

#### DATI TECNICI - TECHNICAL DATA

| Codice - Code                                                                             | PMP204             | PMP204M            | PMP403             | PMP403M            |
|-------------------------------------------------------------------------------------------|--------------------|--------------------|--------------------|--------------------|
| Imballo - Package                                                                         | Singolo - Single   | Industriale - Bulk | Singolo - Single   | Industriale - Bulk |
| Portata d'acqua - Water flow                                                              | 7,0 L/min          |                    | 10,6 L/min         |                    |
| Taratura pressostato default - Default pressure switch calibration                        | 1,4 bar            |                    | 2,1 bar            |                    |
| Taratura pressostato - Pressure switch calibration                                        | 1,1-2,1 bar        |                    | 1,75-3,2 bar       |                    |
| Sensibilità pressostato per riattivazione<br>Pressure switch sensibility for reactivation | 1,0 bar            |                    | 1,8 bar            |                    |
| Altezza massima di sollevamento - Maximum lifting height                                  | 2,5 m              |                    | 3,1 m              |                    |
| Tensione - Tension                                                                        | 12 Vda             |                    | 12 Vda             |                    |
| Assorbimento - Absorption                                                                 | 4,5 A              |                    | 4,0 A              |                    |
| Peso - Weight                                                                             | 1,8 Kg             |                    | 1,8 Kg             |                    |
| Dimensioni - Dimensions                                                                   | 210 x 129 x 114 mm |                    | 210 x 129 x 114 mm |                    |

Portata d'acqua - Water flow (L/min)

Consumo di energia - Energy consumption (ampere)

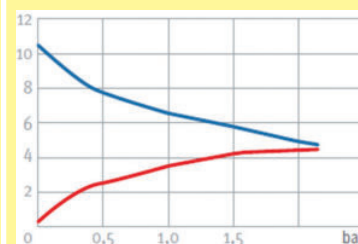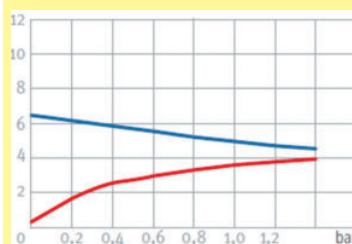

GES International S.r.l.  
Via Giuseppe Di Vittorio, 307/31A  
20099 Sesto San Giovanni (MI) ITALIA  
Tel. (39) 02.22.471.848 • Fax (39) 02.22.471.981  
info@gesinternational.it • www.gesinternational.it